

Nitrofurantoin Capsules

Type of Posting	Revision Bulletin
Posting Date	30-Sep-2016
Official Date	01-Oct-2016
Expert Committee	Chemical Medicines Monographs 1
Reason for Revision	Compliance

In accordance with the Rules and Procedures of the 2015-2020 Council of Experts, the Chemical Medicines Monographs 1 Expert Committee has revised Nitrofurantoin Capsules monograph. The purpose for the revision is to add *Dissolution Test 6* for the drug product approved by the FDA.

The Nitrofurantoin Capsules Revision Bulletin supersedes the currently official monograph. The Revision Bulletin will be incorporated in the *First Supplement to USP 40-NF 35*.

Should you have any questions, please contact Shankari Shivaprasad, Ph.D. Senior Scientific Liaison (301-230-7426 or sns@usp.org).

Nitrofurantoin Capsules

DEFINITION

Nitrofurantoin Capsules contain NLT 90.0% and NMT 110.0% of the labeled amount of nitrofurantoin ($C_8H_6N_4O_5$).

IDENTIFICATION

A. INFRARED ABSORPTION

Sample: Add 10 mL of 6 N acetic acid to a quantity of the contents of Capsules equivalent to 100 mg of nitrofurantoin. Boil the solution for a few min, and filter while hot. Cool to room temperature, collect the precipitate of nitrofurantoin, and dry at 105° for 1 h.

Acceptance criteria: The IR absorption spectrum of a mineral oil dispersion of the precipitate so obtained exhibits maxima only at the same wavelength as that of a similar solution of USP Nitrofurantoin RS.

- B.** The retention time of the *Sample solution* corresponds to that of the *Standard solution*, as obtained in the Assay.

ASSAY

PROCEDURE

Solution A: Dissolve 6.8 g of monobasic potassium phosphate in 500 mL of water. Add a volume of 1.0 N sodium hydroxide (about 30 mL) sufficient to adjust to a pH of 7.0, and dilute with water to 1 L.

Mobile phase: Acetonitrile and *Solution A* (3:22)

Internal standard solution: 1 mg/mL of acetanilide in water

Standard solution: Dissolve 50 mg of USP Nitrofurantoin RS in 40.0 mL of dimethylformamide, and add 50.0 mL of *Internal standard solution*.

Sample solution: Transfer, as completely as possible, the contents of 20 Capsules to a 500-mL flask. Place the emptied Capsules in a beaker, add 25 mL of dimethylformamide, and agitate for 1 min. Decant into the flask containing the Capsule contents. Rinse the emptied Capsules with another two 25-mL portions of dimethylformamide, and decant into the flask. Add sufficient dimethylformamide to bring the volume to about 250 mL. Insert the stopper in the flask, and shake by mechanical means for 15 min. Dilute with dimethylformamide to volume, and mix. If necessary, the sample may be homogenized using a disperser. Pass through a medium-porosity, sintered-glass filter into a suitable flask. Transfer an aliquot, equivalent to 50 mg of nitrofurantoin, to a flask. Add an accurately measured volume of dimethylformamide to bring the volume in the flask to 40.0 mL. To the flask add 50.0 mL of *Internal standard solution*, mix, and cool to room temperature. Pass a portion of the solution through a nylon filter of 0.45- μ m pore size, discarding the first few mL of the filtrate.

Chromatographic system

(See *Chromatography* (621), *System Suitability*.)

Mode: LC

Detector: UV 254 nm

Column: 3.9-mm \times 30-cm; packing L1

Injection volume: 5–10 μ L

System suitability

Sample: *Standard solution*

[NOTE—Adjust the operating parameters so that the retention time of the nitrofurantoin peak is about 8 min, and the peak heights are about half full-scale.]

Suitability requirements

Resolution: NLT 3.0 between acetanilide and nitrofurantoin

Relative standard deviation: NMT 2.0%, determined from peak response ratios of replicate injections

Analysis

Samples: *Standard solution* and *Sample solution*
Calculate the percentage of the labeled amount of nitrofurantoin ($C_8H_6N_4O_5$) in the portion of the powder included in the sample aliquot:

$$\text{Result} = (R_U/R_S) \times (C_S/C_U) \times 100$$

R_U = peak response ratio from the *Sample solution*
 R_S = peak response ratio from the *Standard solution*
 C_S = concentration of USP Nitrofurantoin RS in the *Standard solution* (mg/mL)
 C_U = nominal concentration of the *Sample solution* (mg/mL)

Acceptance criteria: 90.0%–110.0%

PERFORMANCE TESTS

Change to read:

DISSOLUTION (711)

Test 1 (where it is labeled as containing nitrofurantoin macrocrystals)

Medium: pH 7.2 (\pm 0.05) phosphate buffer; 900 mL

Apparatus 1: 100 rpm

Times: 1, 3, and 8 h

Standard solution: USP Nitrofurantoin RS in *Medium*

Sample solution: Pass a portion of the solution under test through a suitable filter. Dilute with *Medium*, if necessary.

Blank: *Medium*

Instrumental conditions

Mode: UV

Analytical wavelength: 375 nm

Tolerances: See *Table 1*.

Table 1

Time (h)	Amount Dissolved
1	20%–60%
3	NLT 45%
8	NLT 60%

The percentage of the labeled amount of nitrofurantoin ($C_8H_6N_4O_5$) dissolved at the 1-h point conforms to *Acceptance Table 2* in *Dissolution* (711), and the percentages dissolved at the 3- and 8-h points conform to the criteria for the final test time in *Acceptance Table 2* in (711).

Test 2 (where it is labeled as containing both nitrofurantoin macrocrystalline and monohydrate forms): If the product complies with this test, the labeling indicates that it meets USP *Dissolution Test 2*.

Acid medium: 0.01 N hydrochloric acid for 1 h; 900 mL

pH 7.5 buffer medium: Prepare a pH 7.5 buffer concentrate by dissolving 62.2 g of potassium hydroxide and 129.3 g of monobasic potassium phosphate in water, dilute with water to 1 L, and mix. After 1 h, change the *Acid medium* to pH 7.5 *buffer medium* by adding 50 mL of pH 7.5 buffer concentrate, and run for an additional 6 h.

Apparatus 2: 100 rpm, with sinkers made of Teflon-coated steel wire prepared by forming a coil approximately 22 mm long from a 13-cm length of 20-gauge wire (see *Figure 1*)

2 Nitrofurantoin

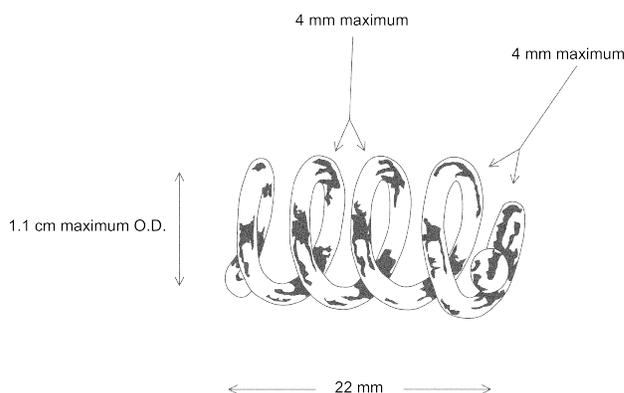


Figure 1. Sinkers.

Times: 1, 3, and 7 h

Acid-stage standard solution: 0.025 mg/mL of USP Nitrofurantoin RS in *Acid medium*

Buffer-stage standard solution: 0.075 mg/mL of USP Nitrofurantoin RS in *pH 7.5 buffer medium*

Instrumental conditions

Mode: UV

Analytical wavelength: 375 nm

Analysis: Calculate the percentages of the labeled amount (Q) of nitrofurantoin ($C_8H_6N_4O_5$) dissolved from UV absorbances at the isosbestic wavelength at about 375 nm on filtered portions of each solution under test, suitably diluted, if necessary, with *Acid medium* or *pH 7.5 buffer medium* when appropriate, in comparison with the appropriate *Standard solution*.

Tolerances: See *Table 2*.

Table 2

Time (h)	Amount Dissolved (Individual)	Amount Dissolved (Mean)
1	2%–16%	5%–13%
3	27%–69%	39%–56%
7	NLT 68%	NLT 81%

The percentages of the labeled amount of nitrofurantoin ($C_8H_6N_4O_5$) dissolved at the specified times conform to *Table 3*.

Table 3

Level	Number Tested	Criteria
L_1	12	The mean percentage of dissolved label claim lies within the range for the means at each interval and is NLT the stated amount at the final test time. All individual values lie within the ranges for the individuals at each interval and are NLT the stated amount at the final test time.
L_2	12	The mean percentage of dissolved label claim lies within the range for the means at each interval and is NLT the stated amount at the final test time. NMT 2 of the 24 individual values lie outside the stated ranges for individuals at each interval, and NMT 2 of 24 are less than the stated amount at the final test time.

Test 3 (where it is labeled as containing both nitrofurantoin macrocrystalline and monohydrate forms): If the product complies with this test, the labeling indicates that it meets USP *Dissolution Test 3*.

Acid medium, pH 7.5 buffer medium, Apparatus 2, Times, Acid-stage standard solution, Buffer-stage standard solution, and Analysis: Proceed as directed in *Test 2*.

Tolerances: See *Table 4*.

Table 4

Time (h)	Amount Dissolved (Individual)	Amount Dissolved (Mean)
1	2%–16%	5%–13%
3	50%–80%	55%–75%
7	NLT 85%	NLT 90%

The percentages of the labeled amount of nitrofurantoin ($C_8H_6N_4O_5$) dissolved at the specified times conform to *Acceptance Table 2* in (711).

Test 4 (where it is labeled as containing both nitrofurantoin macrocrystalline and monohydrate forms): If the product complies with this test, the labeling indicates that it meets USP *Dissolution Test 4*.

Acid medium: 0.01 N hydrochloric acid for 1 h; 900 mL, deaerated

pH 7.5 buffer medium: Prepare a pH 7.5 buffer concentrate by dissolving 62.2 g of potassium hydroxide and 129.3 g of monobasic potassium phosphate in water, dilute with water to 1 L, and mix. After 1 h change the *Acid medium* to *pH 7.5 buffer medium* by adding 50 mL of pH 7.5 buffer concentrate, and run for an additional 9 h.

Apparatus 2: 100 rpm, with helix sinkers

Times: 1, 3, and 10 h

Standard stock solution: Transfer 25 mg of USP Nitrofurantoin RS to a 10-mL volumetric flask. Add 7.5 mL of dimethylformamide, and sonicate until dissolved. Allow to cool to room temperature, and dilute with dimethylformamide to volume.

Acid-stage standard solution: Dilute 2.0 mL of the *Standard stock solution* with *Acid medium* to 200 mL.

Buffer-stage standard solution: Transfer 3.0 mL of the *Standard stock solution* to a 100-mL volumetric flask, and dilute with *pH 7.5 buffer medium* to volume.

Stock capsule shell blank: Place 10 empty, clean Capsules into a 900-mL volumetric flask, and add 800 mL of *Acid medium*. Gently heat to $37 \pm 0.5^\circ$, and stir until all the Capsules are dissolved. Allow to cool to room temperature, and dilute with *Acid medium* to volume.

Buffer-stage capsule shell blank: Transfer 100.0 mL of the *Stock capsule shell blank* to a 1000-mL volumetric flask. Add 56 mL of *pH 7.5 buffer medium*, dilute with *Acid medium* to volume, and mix. Filter, using the same filter as for the *Sample solution*.

Sample solution: Pass portions of the solution under test through a 1.2- μ m glass/0.45- μ m polyethersulfone combination filter, discarding the first few mL.

Instrumental conditions

Mode: UV

Analytical wavelength: 375 nm

Analysis: Calculate the percentages of the labeled amount of nitrofurantoin ($C_8H_6N_4O_5$) dissolved from portions of the *Sample solution* in comparison with the appropriate *Acid-stage standard solution* or *Buffer-stage standard solution*. Correct for the appropriate capsule shell blank absorbance, using a 0.1-cm cell, and the appropriate medium as the blank.

Tolerances: See Table 5.

Table 5

Time (h)	Amount Dissolved
1	NMT 25%
3	25%–50%
10	NLT 80%

The percentages of the labeled amount of nitrofurantoin ($C_8H_6N_4O_5$) dissolved at the specified times conform to *Acceptance Table 2* in (711).

Test 5 (where it is labeled as containing both nitrofurantoin macrocrystalline and monohydrate forms): If the product complies with this test, the labeling indicates that it meets USP *Dissolution Test 5*.

Acid medium: 0.01 N hydrochloric acid for 1 h; 900 mL, deaerated

Buffer concentrate: 60 g/L of potassium hydroxide and 129.3 g/L of monobasic potassium phosphate in water

pH 7.5 buffer medium: Prepare by adding 60 mL of *Buffer concentrate* to 890 mL of *Acid medium*.

Apparatus 2: 100 rpm, with Teflon-coated sinkers and paddles

Times: 1, 3, and 7 h

Standard stock solution: 2.48 mg/mL of USP Nitrofurantoin RS in acetonitrile. Sonicate using 50% of the final volume of acetonitrile to dissolve. Use an amber volumetric flask.

Acid-stage standard solution: 24.8 μ g/mL of USP Nitrofurantoin RS in *Acid medium* from *Standard stock solution*. Use an amber volumetric flask.

Buffer-stage standard solution: 74.4 μ g/mL of USP Nitrofurantoin RS in *pH 7.5 buffer medium* from *Standard stock solution*. Use an amber volumetric flask.

Acid-stage sample solution: After 1 h, collect 10 mL of the solution under test, and pass through a 0.45- μ m PVDF filter, discarding the first 5 mL of the filtrate.

Buffer-stage sample solution: After removing 10 mL of *Acid medium*, add 60 mL of *pH 7.5 buffer medium*. The pH of the resulting medium should be about 7.5. Continue the dissolution for another 2 h and 6 h. Collect 10 mL at each time point, and pass through a 0.45- μ m PVDF filter, discarding the first 5 mL of the filtrate.

Acid-stage blank: Use *Acid medium*.

Buffer-stage blank: Use *pH 7.5 buffer medium*.

Instrumental conditions

Mode: UV

Analytical wavelength: 375 nm

Cell: 0.5 cm for acid-stage and 0.1 cm for buffer-stage

Analysis

Samples: *Acid-stage standard solution*, *Buffer-stage standard solution*, *Acid-stage sample solution*, *Buffer-stage sample solution*, *Acid-stage blank*, and *Buffer-stage blank*

Calculate the concentration (C_i) of nitrofurantoin ($C_8H_6N_4O_5$) in the sample withdrawn from the vessel at each time point (i):

$$\text{Result}_i = (A_U/A_S) \times C_S$$

A_U = absorbance of the *Sample solution*

A_S = absorbance of the *Standard solution*

C_S = concentration of the *Standard solution* (mg/mL)

Calculate the percentage of the labeled amount of nitrofurantoin ($C_8H_6N_4O_5$) dissolved at each time point (i):

$$\text{Result}_1 = C_1 \times V_1 \times (1/L) \times 100$$

$$\text{Result}_2 = [(C_2 \times V_2) + (C_1 \times V_3)] \times (1/L) \times 100$$

$$\text{Result}_3 = \{(C_3 \times V_3) + [(C_2 + C_1) \times V_3]\} \times (1/L) \times 100$$

C_i = concentration of nitrofurantoin in the portion of sample withdrawn at the specified time point (mg/mL)

V_1 = volume of medium, 900 mL

L = label claim (mg/Capsule)

V_2 = volume of medium, 950 mL

V_3 = volume of the *Sample solution* withdrawn at each time point, 10 mL

V_3 = volume of medium, 940 mL

Tolerances: See Table 6.

Table 6

Time Point (i)	Time (h)	Amount Dissolved (Individual)	Amount Dissolved (Mean)
1	1	NMT 12%	NMT 12%
2	3	NLT 80%	80%–100%
3	7	NLT 85%	NLT 90%

The percentages of the labeled amount of nitrofurantoin ($C_8H_6N_4O_5$) dissolved at the specified times conform to Table 7.

Table 7

Level	Number Tested	Criteria
L ₁	12	The mean percentage of dissolved label claim lies within the range for the means at each interval and is NLT the stated amount at the final test time. All individual values lie within the ranges for the individuals at each interval and are NLT the stated amount at the final test time.
L ₂	12	If the requirements of level L ₁ are not met, test another twelve (12) Capsules. The requirements are met if the mean percentage of dissolved label claim of all 24 Capsules tested lies within the range for the means at each interval and is NLT the stated amount at the final test time. NMT 2 of the 24 individual values of Capsules lie outside the stated range for individuals at each interval, and NMT 2 of 24 Capsules are less than the stated amount at the final test time.

• **Test 6** (where it is labeled as containing both nitrofurantoin macrocrystalline and monohydrate forms): If the product complies with this test, the labeling indicates that it meets USP *Dissolution Test 6*.

Acid medium: 0.01 N hydrochloric acid; 900 mL

pH 7.5 buffer concentrate: Prepare a pH 7.5 buffer concentrate by dissolving 62.2 g of potassium hydrox-

4 Nitrofurantoin

ide and 129.3 g of monobasic potassium phosphate in water and dilute with water to 1 L.

pH 7.5 buffer medium: 900 mL of *Acid medium* and 50 mL of *pH 7.5 buffer concentrate*

Apparatus 2: 100 rpm, with sinkers made of Teflon-coated steel wire prepared by forming a coil approximately 22 mm long from a 13-cm length of 20-gauge wire (see *Figure 1* in *Dissolution Test 2*)

Times

Acid stage: 1 h

Buffer stage: 3, 4, and 7 h

Acid-stage standard stock solution: 0.11 mg/mL of USP Nitrofurantoin RS in *Acid medium* prepared as follows. Weigh a suitable amount of USP Nitrofurantoin RS in a volumetric flask and add about 2.5% of the flask volume of *N,N*-dimethylformamide. Sonicate to dissolve completely. Dilute with *Acid medium* to final volume.

Acid-stage standard solution: 4.4 µg/mL of USP Nitrofurantoin RS in *Acid medium* from *Acid-stage standard stock solution*

Buffer-stage standard stock solution: 0.11 mg/mL of USP Nitrofurantoin RS in *pH 7.5 buffer medium* prepared as follows. Weigh a suitable amount of USP Nitrofurantoin RS in a volumetric flask and add about 2.5% of the flask volume of *N,N*-dimethylformamide. Sonicate to dissolve completely. Dilute with *pH 7.5 buffer medium* to final volume.

Buffer-stage standard solution: 4.4 µg/mL of USP Nitrofurantoin RS in *pH 7.5 buffer medium* from *Buffer-stage standard stock solution*

Acid-stage sample solution: Pass portions of the solution under test through a suitable filter and discard the first few mL. Dilute with *Acid medium*, if necessary.

Buffer-stage sample solution: Pass portions of the solution under test through a suitable filter and discard the first few mL. Dilute with *pH 7.5 buffer medium*, if necessary.

Instrumental conditions

Mode: UV

Analytical wavelength: 375 nm

Dissolution medium: After 1 h in the *Acid medium*, withdraw 10 mL of the solution under test and add 50 mL of *pH 7.5 buffer concentrate*.

Analysis: After 1 h in *Acid medium*, withdraw 10 mL of solution under test. Add 10 mL of *Acid medium*, previously warmed to 37 ± 0.5°. Add 50 mL of *pH 7.5 buffer concentrate*, previously warmed to 37 ± 0.5° and continue the test for 6 h more. At specified times, withdraw 10 mL of solution under test and replace with 10 mL of *pH 7.5 buffer medium*, previously warmed to 37 ± 0.5°.

Calculate the percentages of the labeled amount of nitrofurantoin (C₈H₆N₄O₅) dissolved from portions of the *Acid-stage sample solution* or *Buffer-stage sample solution* in comparison with the appropriate *Acid-stage standard solution* or *Buffer-stage standard solution*. Correct for the appropriate capsule shell absorbance and the appropriate medium as the blank.

Tolerances: See *Table 8*.

Table 8

Time (h)	Amount Dissolved (Individual)	Amount Dissolved (Mean)
1	2%–16%	3%–11%
3	15%–45%	22%–37%
4	45%–95%	65%–85%
7	NLT 80%	NLT 85%

The percentages of the labeled amount of nitrofurantoin (C₈H₆N₄O₅) dissolved at the specified times conform to *Dissolution* (711), *Acceptance Table 2*. (RB 1-Oct-2016)

• **UNIFORMITY OF DOSAGE UNITS (905)**

Procedure for content uniformity

Solution A, Mobile phase, Internal standard solution, Standard solution, Chromatographic system, and Analysis: Proceed as directed in the *Assay*.

Sample solution: Transfer the contents of 1 Capsule to a suitable flask, and add a volume of dimethylformamide to obtain a solution having a concentration of about 1.2 mg/mL of nitrofurantoin. Shake the flask for 15 min. If necessary, the sample may be homogenized, using a disperser. In the case of a 50- or 100-mg Capsule, transfer 40.0 mL of this solution to a suitable flask, add 50.0 mL of *Internal standard solution*, mix, and cool to room temperature. Pass a portion of the solution through a nylon filter of 0.45-µm pore size, discarding the first few mL of the filtrate. In the case of a 25-mg Capsule, transfer 20.0 mL of the solution to a suitable flask, and add 25.0 mL of *Internal standard solution* instead of 50.0 mL.

Acceptance criteria: Meet the requirements

IMPURITIES

• **ORGANIC IMPURITIES: LIMIT OF NITROFUZAZONE**

Solution A: Prepare as directed in the *Assay*.

Mobile phase: Tetrahydrofuran and *Solution A* (1:9)

System suitability stock solution: 5.0 µg/mL each of nitrofurazone and nitrofurantoin in dimethylformamide

System suitability solution: *System suitability stock solution* and *Mobile phase* (1:10)

Standard stock solution: 5.0 µg/mL of USP Nitrofurazone RS in dimethylformamide

Standard solution: Transfer 2.0 mL of the *Standard stock solution* into a glass-stoppered flask, add 20.0 mL of water, and mix.

Sample solution: Transfer a portion of Capsule contents equivalent to 100 mg of nitrofurantoin into a 25-mL glass-stoppered flask. Add 2.0 mL of dimethylformamide, and shake for 5 min. Add 20.0 mL of water, mix, and allow to stand for 15 min. Pass a portion of the mixture through a nylon filter of 0.45-µm pore size.

Chromatographic system

(See *Chromatography* (621), *System Suitability*.)

Mode: LC

Detector: UV 375 nm

Column: 3.9-mm × 30-cm; packing L1

Flow rate: 1.6 mL/min

Injection volume: 60–100 µL

System suitability

Samples: *System suitability solution* and *Standard solution*

[NOTE—Adjust the operating parameters so that the nitrofurazone peak in the chromatogram of the *Standard solution* has a retention time of about 10.5 min and a height of about 0.1 full-scale.]

Suitability requirements

Resolution: NLT 4.0 between the nitrofurazone and nitrofurantoin peaks, *System suitability solution*

Relative standard deviation: NMT 2.0%, *Standard solution*

Analysis

Samples: *Standard solution* and *Sample solution*

Acceptance criteria: The height of any peak from the *Sample solution* at a retention time corresponding to that of the main peak from the *Standard solution* is NMT the height of the main peak from the *Standard solution*. NMT 0.01% of nitrofurazone is found.

ADDITIONAL REQUIREMENTS

- **PACKAGING AND STORAGE:** Preserve in tight containers, and store at controlled room temperature.
- **LABELING:** Capsules that contain the macrocrystalline form of nitrofurantoin are so labeled. When more than one *Dissolution* test is given, the labeling states the *Dissolution* test used only if *Test 1* is not used.

- **USP REFERENCE STANDARDS** <11>
 - USP Nitrofurantoin RS
 - USP Nitrofurazone RS